

# CH10x38 gG 0.5A/500V



## Specifikacije

|                  |   |
|------------------|---|
| Šifra proizvoda  | 002620017                                   |
| Opis             | CH10x38 gG 0.5A/500V                        |
| Težina           | 7.6   |
| Nivo             | Cilindrični topljivi umetci (gG)            |
| AC Prekidna moć  | 100   |
| Karakteristika   | gG  |
| Dimenzija        | 10X38                                       |
| Grupa proizvoda  | Niskonaponski cilindrični topljivi umetci C |
| Nazivni AC napon | 500   |
| Nazivna struja   | 0,5   |
| Veličina         | CH10  |
| Tip              | CH  |


Web stranica proizvoda 

## Druga dokumentacija




CE izjava  
Tehnički podaci

# Karakteristike granične propuštene struje

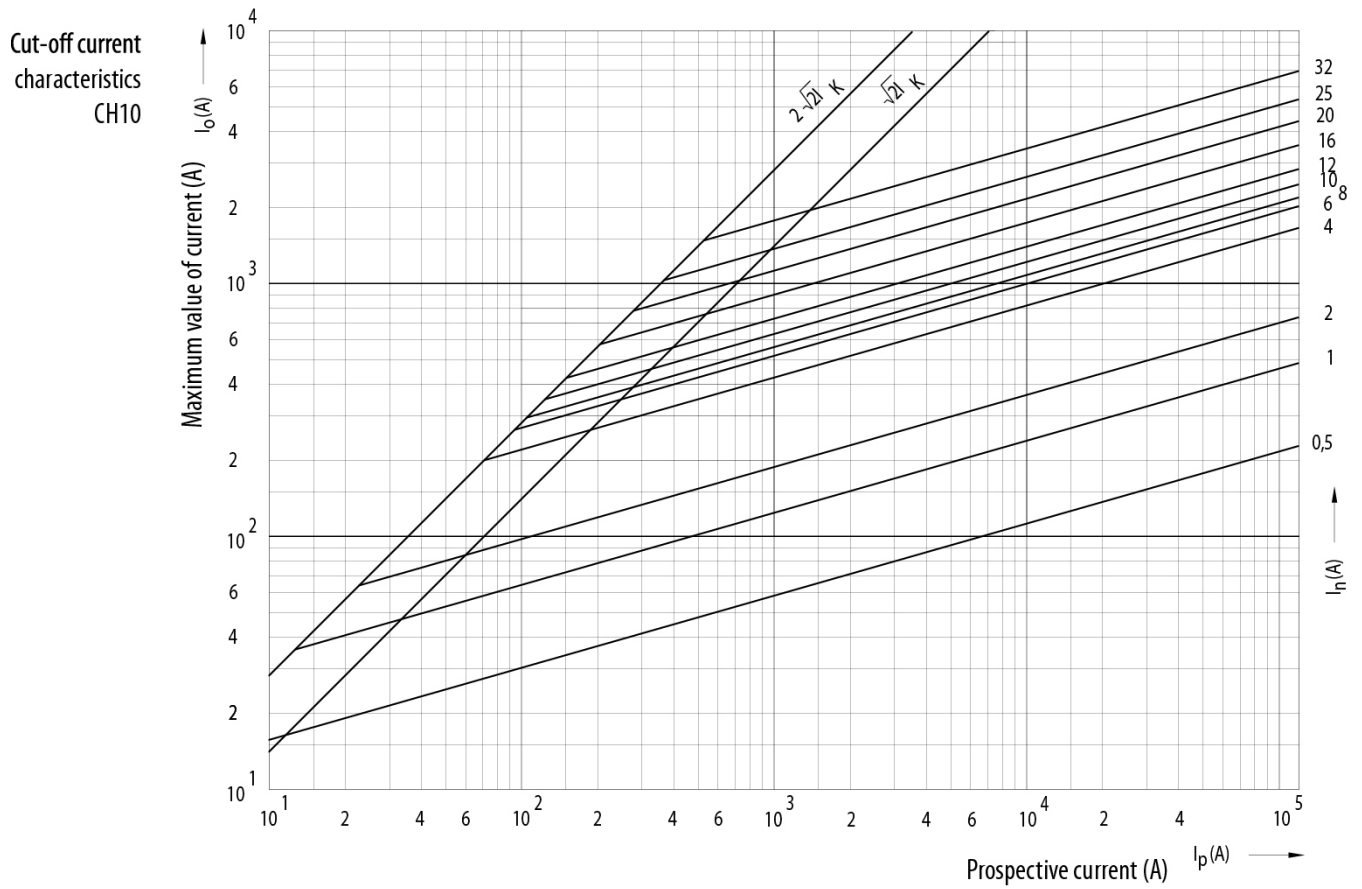


# Diagram I<sup>2</sup>t

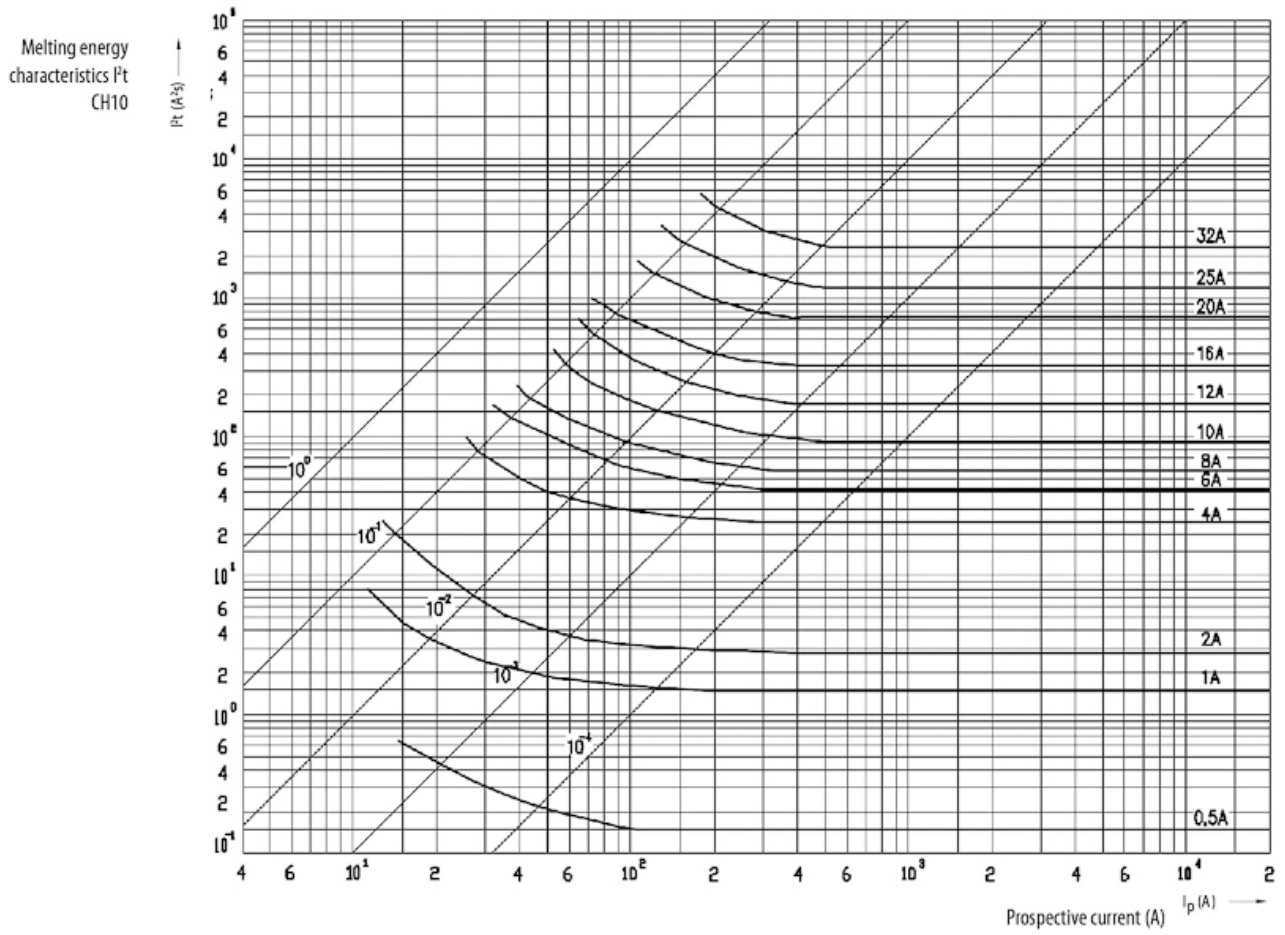


# Vremensko-strujna karakteristika

## I/t

Time current  
characteristics I/t, gG  
CH10

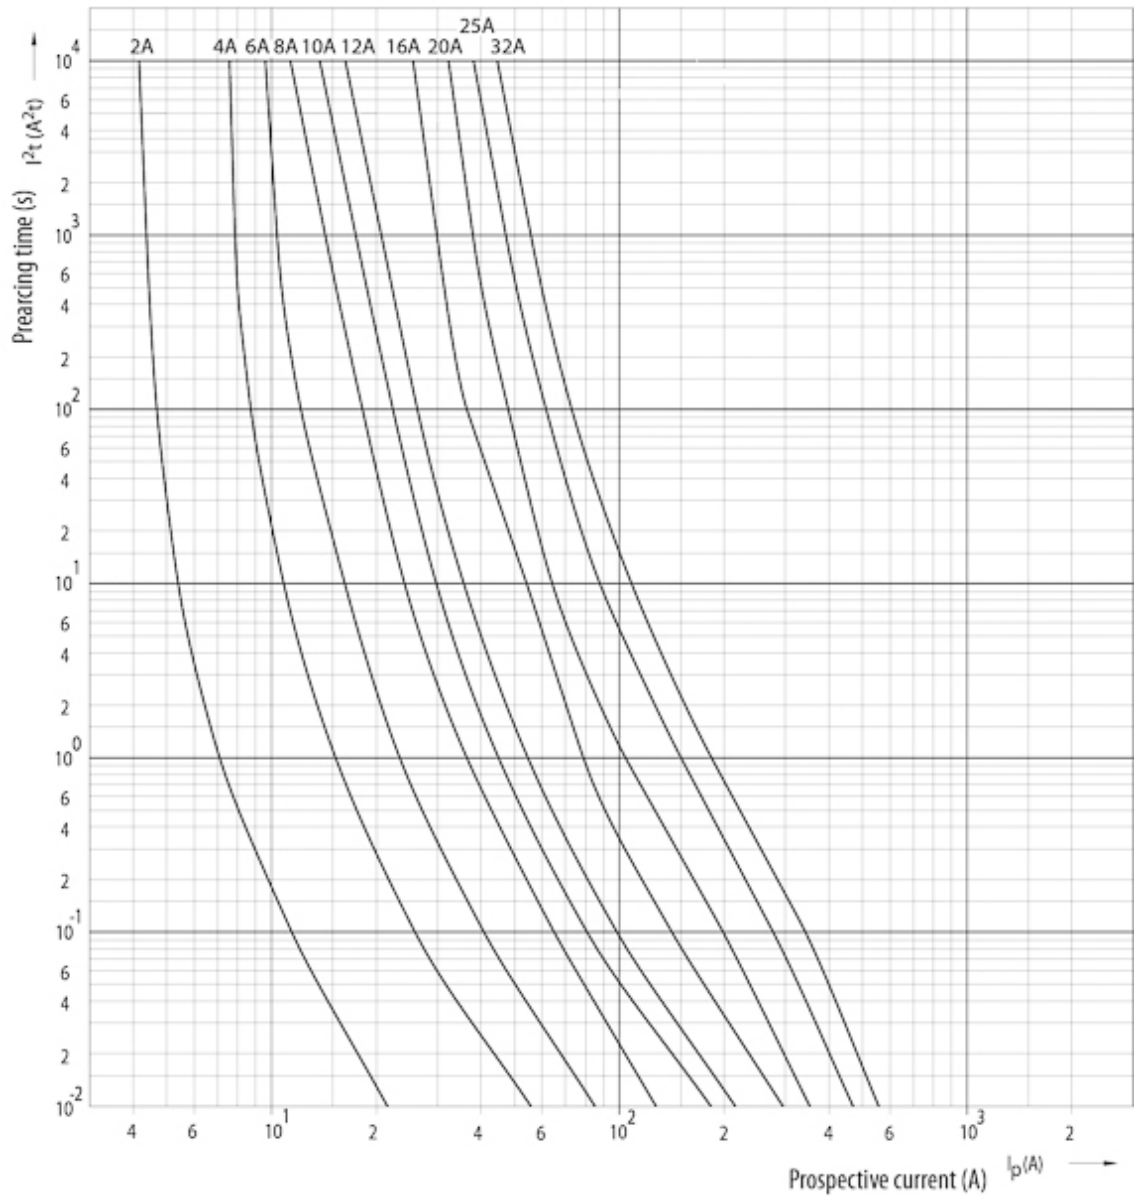

## Dimenzije

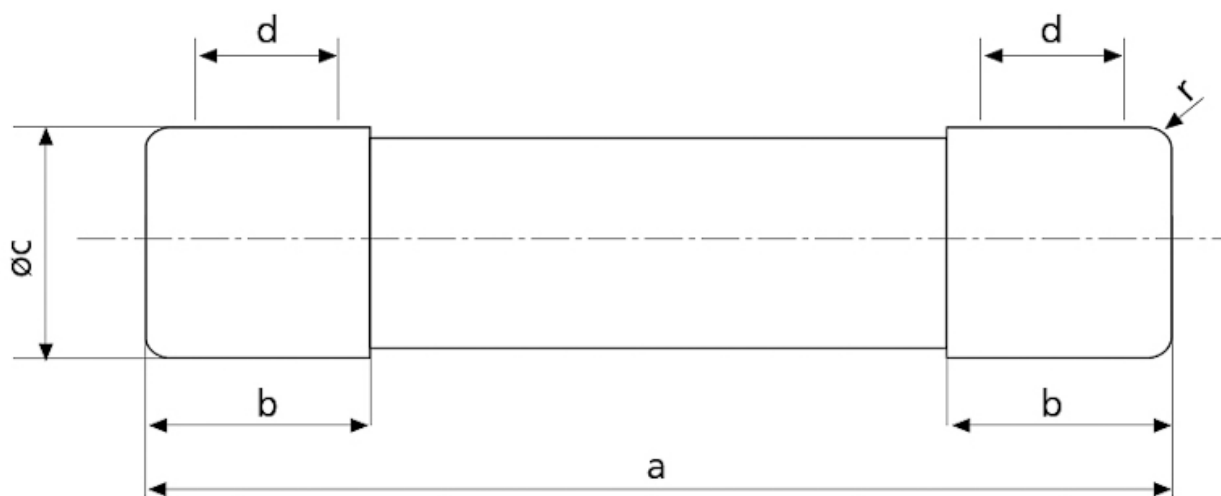

|         | $a$               | $b_{\text{max.}}$ | $c$            | $d_{\text{min.}}$ | $r$           |
|---------|-------------------|-------------------|----------------|-------------------|---------------|
| 8 x 32  | $31,5 \pm 0,5$    | 6,7               | $8,5 \pm 0,1$  | 4                 | $1 \pm 0,5$   |
| 10 x 38 | $38,0 \pm 0,6$    | 10,5              | $10,3 \pm 0,1$ | 6                 | $1,5 \pm 0,5$ |
| 14 x 51 | $51,0 + 0,6 / -1$ | 13,8              | $14,3 \pm 0,1$ | 7,5               | $\pm 1$       |
| 22 x 58 | $58,0 + 0,1$      | 16,2              | $22,2 \pm 0,1$ | 11                | $\pm 1$       |