

# Products with cover frame

## Switches and push-buttons

**Common characteristics**

- Voltage: 250 V AC
- Cables: 2 x 2.5 mm<sup>2</sup> rigid/flexible cables
- Certification: VDE
- Quality mark: CE

1-pole					1-pole with pictogram				
<b>One-way switch</b>		<b>Two-way switch</b>		<b>Intermediate switch</b>	<b>Push-button</b>	<b>Push-button "bell"</b>	<b>Push-button "light"</b>		
Degrees of protection	IP 20	IP 44	IP 20	IP 44					
Rated current	10 AX				10 A				
Terminals	Colour								
Screwless	<input type="checkbox"/> white	EPH0100121	EPH0100221	EPH0400121	EPH0400421	EPH0500121	EPH0700121	EPH0800121	EPH0900121
	<input type="checkbox"/> cream	EPH0100123	EPH0100223	EPH0400123	EPH0400423	EPH0500123	EPH0700123	EPH0800123	EPH0900123
Screw	<input type="checkbox"/> white	EPH0100321		EPH0400321		EPH0500321	EPH0800321		
	<input type="checkbox"/> cream	EPH0100323		EPH0400323		EPH0500323	EPH0800323		

1-pole			2-pole		
<b>Two circuits switch</b>	<b>Double two-way switch</b>	<b>Double push-button</b>	<b>2-pole switch</b>		
Degrees of protection	IP 20				
Rated current	10 AX		10 A	10 AX	
Terminals	Colour				
Screwless	<input type="checkbox"/> white	EPH0300121	EPH0600121	EPH1100121	EPH0200121
	<input type="checkbox"/> cream	EPH0300123	EPH0600123	EPH1100123	EPH0200123
Screw	<input type="checkbox"/> white	EPH0300321	EPH0600321	EPH1100321	EPH0200321
	<input type="checkbox"/> cream	EPH0300323	EPH0600323	EPH1100323	EPH0200323


1-pole with locator lamp				1-pole with locator lamp and pictogram				
<b>One-way switch</b>	<b>Two-way switch</b>	<b>Push-button</b>	<b>Push-button "bell"</b>	<b>Push-button "light"</b>	<b>Push-button "stairs"</b>			
Degrees of protection	IP 20							
Rated current	10 AX	16 AX	10 AX	10 A				
Terminals	Colour							
Screwless	<input type="checkbox"/> white	EPH1400121	-	EPH1500121	EPH1600121	EPH1700121	EPH1800121	EPH1900121
	<input type="checkbox"/> cream	EPH1400123	-	EPH1500123	EPH1600123	EPH1700123	EPH1800123	EPH1900123
Screw	<input type="checkbox"/> white	EPH1400321	EPH1430321	EPH1500321	EPH1600321	EPH1700321	-	EPH1900321
	<input type="checkbox"/> cream	EPH1400323	EPH1430323	EPH1500323	EPH1600323	EPH1700323	-	EPH1900323

## Mechanisms for roller blinds

### Characteristics

- Voltage: 250 V AC
- Rated current: 10 A
- Cables: 2 x 2.5 mm<sup>2</sup> rigid/flexible cables
- Degree of protection: IP 20
- Certificates: VDE (Only for push-button)
- Quality mark: CE (For switch and push-button)

### Mechanism for roller blinds



Terminals	Colour	Push-button	Switch
Screwless	<input type="checkbox"/> white	EPH1300121	EPH1300521
	<input type="checkbox"/> cream	EPH1300123	EPH1300523
Screw	<input type="checkbox"/> white	EPH1300321	
	<input type="checkbox"/> cream	EPH1300323	

## Key card switches

### Characteristics

- Rated voltage: 250 V AC
- Rated current: 10 A
- Cables: 2 x 2.5 mm<sup>2</sup> rigid/flexible cables
- Degree of protection: IP 20
- Certification: VDE

### Mechanical card switch




Terminals	Colour	
Screwless	<input type="checkbox"/> white	EPH6200121
	<input type="checkbox"/> cream	EPH6200123

# Products with cover frame


## Socket-outlets

### Common characteristics

- Voltage: 250 V AC
- Rated current: 16 A
- Cables: 2 x 2.5 mm<sup>2</sup> rigid/flexible cables

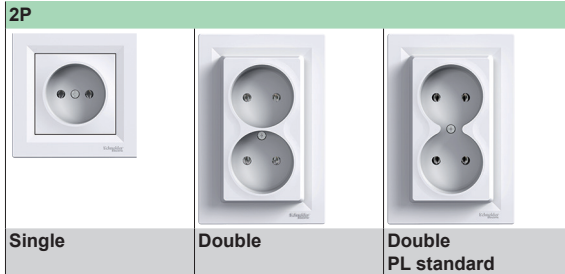

		Single	Double	Double PL standard
Degrees of protection		IP 20		
Terminals	Colour			
Screw	<input type="checkbox"/> white	EPH3000121	EPH9700121	EPH9700221
	<input type="checkbox"/> cream	EPH3000123	EPH9700123	EPH9700223

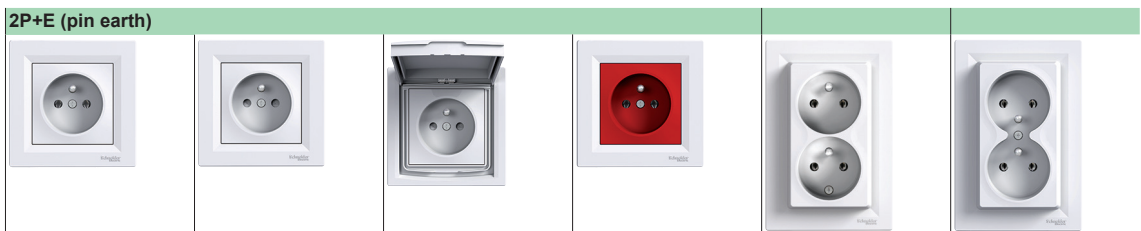

		Single	Single with shutters	Single with shutters and lid	Single with red center plate	Double CZ, SK standards	Double PL standard	
Degrees of protection		IP 20			IP 44	IP 20		
Terminals	Colour							
Screw	<input type="checkbox"/> white	EPH2800121	EPH2800221	EPH2800321	EPH2800421	EPH9800121	EPH9800221	
	<input type="checkbox"/> cream	EPH2800123	EPH2800223	EPH2800323	EPH2800423	EPH9800123	EPH9800223	



		Single	Single with shutters	Single with lid	Single with shutters and lid	Single with shutter and red center plate	Double	
Degrees of protection		IP 20				IP 44	IP 20	
Terminals	Colour							
Screw	<input type="checkbox"/> white	EPH2900121	EPH2900221	EPH3100121	EPH3100321	EPH2900521	EPH9900121	
	<input type="checkbox"/> cream	EPH2900123	EPH2900223	EPH3100123	EPH3100323	EPH2900523	EPH9900123	

### Antenna outlets

**Common characteristics**

- Degree of protection: IP 20
- Quality mark: CE

	TV	TV-R	TV-SAT	TV-R-SAT	TV-SAT-SAT	SAT
Type of connector	IEC Male	IEC male + female	IEC male + F	IEC male + female + F	IEC male + F + F	F
Type						
Ending (1 dB)	<input type="checkbox"/> white <input type="checkbox"/> cream					
Intermediate (4 dB)	<input type="checkbox"/> white <input type="checkbox"/> cream					
Intermediate (8 dB)	<input type="checkbox"/> white <input type="checkbox"/> cream					
Individual (1 dB)	<input type="checkbox"/> white <input type="checkbox"/> cream					
	EPH3200121	EPH3300121	EPH3400121	EPH3500121	EPH3600121	EPH3700121
	EPH3200123	EPH3300123	EPH3400123	EPH3500123	EPH3600123	EPH3700123
	EPH3200221	EPH3300221	EPH3400221	EPH3500221	-	EPH3700221
	EPH3200223	EPH3300223	EPH3400223	EPH3500223	-	EPH3700223
	EPH3200321	EPH3300321	EPH3400321	EPH3500321	-	-
	EPH3200323	EPH3300323	EPH3400323	EPH3500323	-	-
	-	-	EPH3400421	-	-	-
	-	-	EPH3400423	-	-	-

### Data and telephone outlets

**Common characteristics**

- Degree of protection: IP 20


	RJ11	RJ45		
Type				
Single	<input type="checkbox"/> white <input type="checkbox"/> cream	Cat. 5e UTP	Cat. 5e STP	Cat. 6 UTP
Terminals	Screw	IDC	IDC	IDC
	EPH4100121	EPH4300121	EPH5000121	EPH4700121
	EPH4100123	EPH4300123	EPH5000123	EPH4700123
	RJ11	RJ45		RJ45 + RJ12
Type				
Double	<input type="checkbox"/> white <input type="checkbox"/> cream	Cat. 5e UTP	-	Cat. 6 UTP
Terminals	Screw	IDC	-	IDC
	EPH4200121	EPH4400121	-	EPH4800121
	EPH4200123	EPH4400123	-	EPH4800123
	-	-	-	EPH4900121
	-	-	-	EPH4900123

### Loudspeaker outlets

**Characteristics**

- Cables: rigid cables
- Degree of protection: IP20

**Double loudspeaker outlets**









Terminals	Colour	
Screwless	<input type="checkbox"/> white <input type="checkbox"/> cream	EPH5700121
		EPH5700123

### Rotary dimmers

#### Common characteristics

- Rated voltage: 230 V AC 50 Hz
- Cables: 2 x 2.5 mm<sup>2</sup> rigid/flexible cables
- Operating temperature: +5°C to +35°C
- Degree of protection: IP 20
- Certification: FIMKO, NEMKO, SEMKO, TSE, VDE, UKR
- Quality mark: CE

		600 VA, two-way switch	315 VA, two-way switch	
				
Terminals	Colour		with locator lamp <sup>(1)</sup>	
Screw (Pillar type)	<input type="checkbox"/> white	<b>EPH6400121</b>	<b>EPH6500121</b>	<b>EPH6600121</b>
	<input type="checkbox"/> cream	<b>EPH6400123</b>	<b>EPH6500123</b>	<b>EPH6600123</b>
Others characteristics				
Short-circuit protection		Fuse F6, 3 AH - 250 V		Electronic
Loads				
	230 V AC incandescent lamps	40-600 W	40-600 W	20-315 W
	230 V AC halogen lamps	40-600 W	40-600 W	20-315 W
	LV halogen lamps with ferromagnetic transformer	40-600 VA	40-600 VA	-
	LV halogen lamps with electronic transformer	-	-	20-315 VA

<sup>(1)</sup> Locator lamp is under the rotary control button.